

FORTRON® 1140L4 - PPS

Description

40% Glass reinforced, strong and tough, V-0

Fortron 1140L4 is a 40% glass-reinforced grade that is the strongest and toughest product available. It exhibits excellent heat and chemical resistance, good electrical properties and is inherently flame-retardant. The high hardness and rigidity at elevated temperatures allows for good load bearing performance. This product has good weldability due to the modest filler level. Applications made of this grade are electrical components (i.e. bobbins, lamp housings, brush holders) and various other components requiring strength and resistance to aggressive chemicals (i.e. automotive heaters, pumps, valves, fuel rails, microwave oven rings and distillation column packings).

Physical properties	Value	Unit	Test Standard
Density	1650	kg/m ³	ISO 1183
Molding shrinkage, parallel (flow)	0.3	%	ISO 294-4, 2577
Molding shrinkage, transverse normal	0.6	%	ISO 294-4, 2577
Water absorption, 23°C-sat	0.02	%	ISO 62
Bulk density	0.721	g/cm ³	ISO 60

Mechanical properties	Value	Unit	Test Standard
Tensile modulus	14700	MPa	ISO 527-1, -2
Tensile stress at break, 5mm/min	195	MPa	ISO 527-1, -2
Tensile strain at break, 5mm/min	1.8	%	ISO 527-1, -2
Flexural modulus, 23°C	14500	MPa	ISO 178
Flexural stress at break	285	MPa	ISO 178
Charpy impact strength, 23°C	53	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	53	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	10	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	10	kJ/m ²	ISO 179/1eA
Izod impact notched, 23°C	10	kJ/m ²	ISO 180/1A
Izod impact notched, -30°C	10	kJ/m ²	ISO 180/1A
Izod impact unnotched, 23°C	34	kJ/m ²	ISO 180/1U
Izod impact unnotched, -30°C	34	kJ/m ²	ISO 180/1U
Compressive modulus	15000	MPa	ISO 604
Rockwell hardness (M-Scale)	100	M-Scale	ISO 2039-2

Thermal properties	Value	Unit	Test Standard
Melting temperature, 10°C/min	280	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	90	°C	ISO 11357-1,-2,-3
DTUL at 1.8 MPa	270	°C	ISO 75-1, -2
DTUL at 8.0 MPa	215	°C	ISO 75-1, -2
Coeff. of linear therm expansion, parallel	0.26	E-4/°C	ISO 11359-2
Coeff. of linear therm expansion, normal	0.42	E-4/°C	ISO 11359-2
Limiting oxygen index (LOI)	47	%	ISO 4589-1/-2
Flammability @1.6mm nom. thickn.	V-0	class	UL 94
thickness tested (1.6)	1.5	mm	UL 94
Flammability at thickness h	V-0	class	UL 94
thickness tested (h)	0.38	mm	UL 94
Flammability 5V at thickness h	5VA	class	UL 94
thickness tested (5V)	3.0	mm	UL 94
Glow wire ignition temperature, 0.8 mm	825	°C	IEC 60695-2-13

Electrical properties	Value	Unit	Test Standard
Dielectric constant (Dk), 1MHz	4.1	-	IEC 60250
Dissipation factor, 1MHz	20	E-4	IEC 60250
Volume resistivity, 23°C	>1E15	Ohm*m	IEC 62631-3-1
Volume resistivity at high temperature	>1E13	Ohm*m	IEC 62631-3-1
Temperature	220	°C	-
Surface resistivity, 23°C	>1E17	Ohm	IEC 62631-3-2
Surface resistivity at high temperature	>1E12	Ohm	IEC 62631-3-2


FORTRON® 1140L4 - PPS

Temperature	220	°C	-
Electric strength, 23°C (AC)	31	kV/mm	IEC 60243-1
Electric strength at high temperature (AC)	23	kV/mm	IEC 60243-1
Temperature	220	°C	-
Electric strength, 23°C (DC)	40	kV/mm	IEC 60243-2
Electric strength at high temperature (DC)	31	kV/mm	IEC 60243-2
Temperature	220	°C	-
Comparative tracking index	PLC 4	-	UL 746


Rheological calculation properties	Value	Unit	Test Standard
Spec. heat capacity melt	1500	J/(kg K)	Internal



Diagrams

Dynamic Shear modulus-temperature


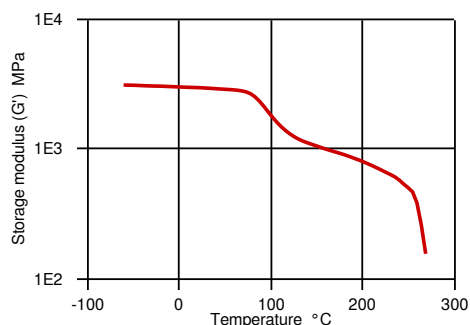






Stress-strain



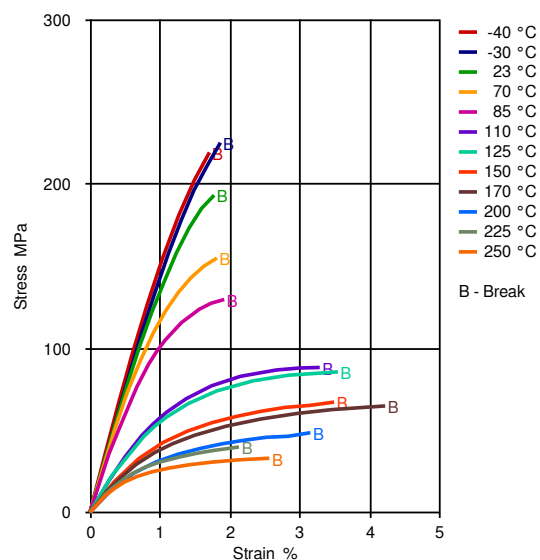


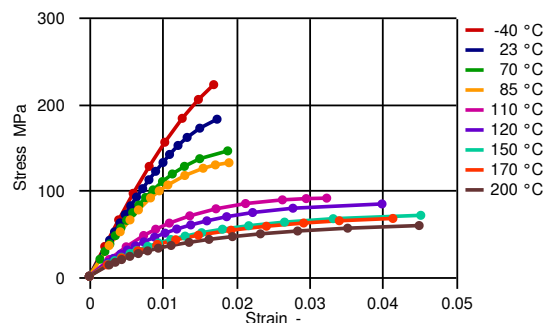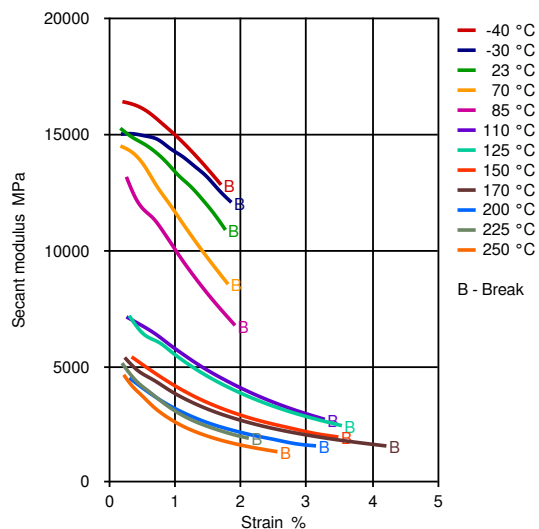

no yield at all temperatures
Poisson's value used is 0.39

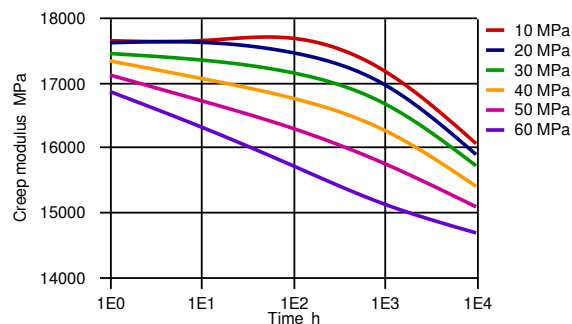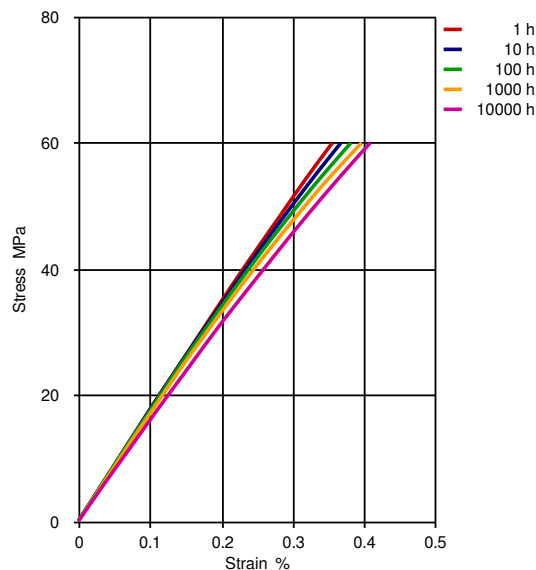

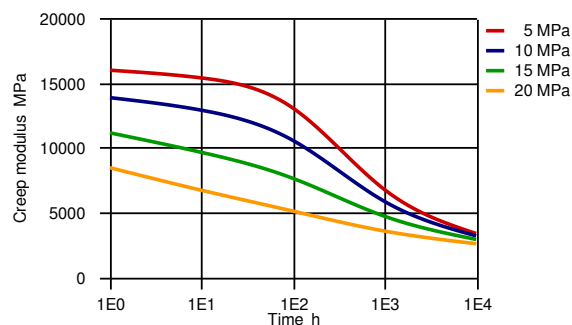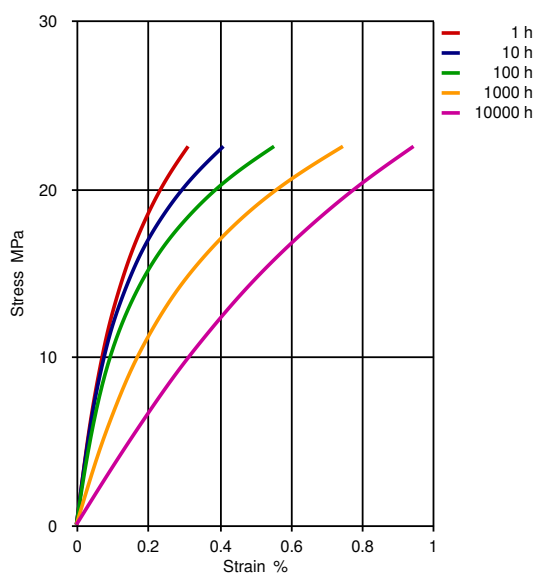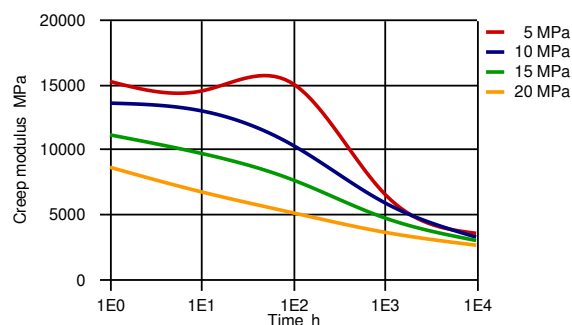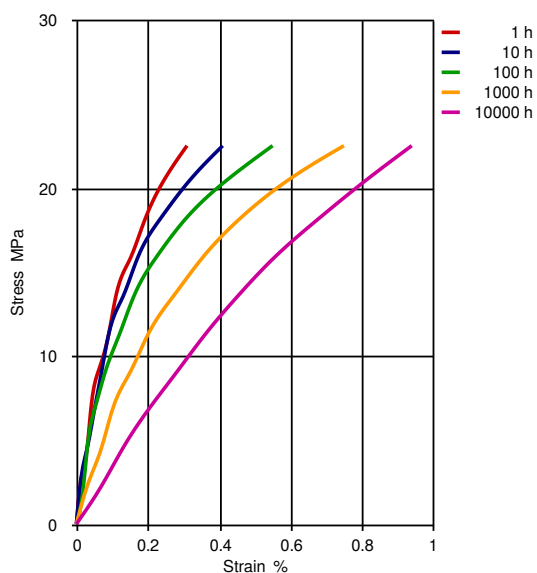

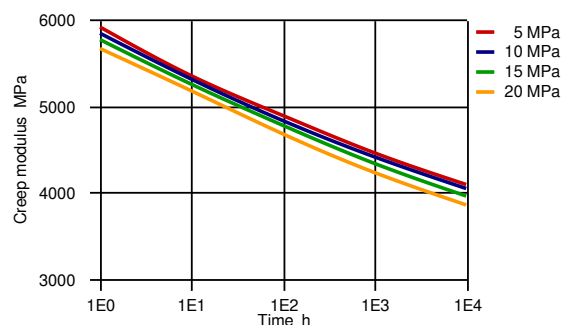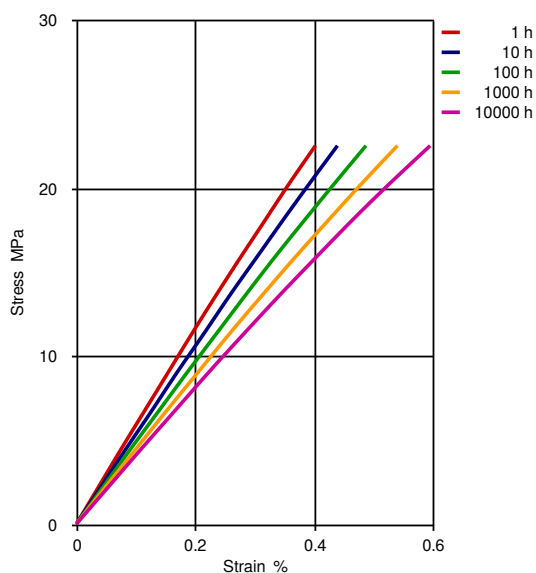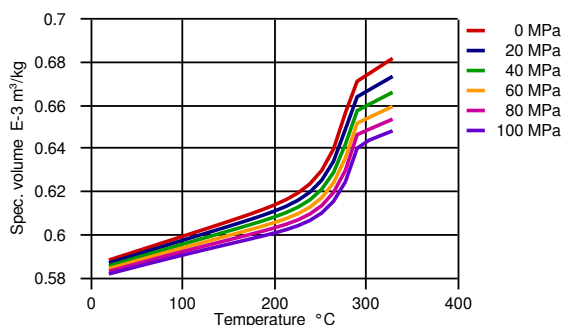
Moldflow Specific volume-temperature (pvT)


DSC Cooling Scan -20 C/min (ASTM E 1269)

Typical injection moulding processing conditions

Pre Drying	Value	Unit
Necessary low maximum residual moisture content	0.02	%
Drying time	3 - 4	h
Drying temperature	130 - 140	°C
Temperature	Value	Unit
Hopper temperature	20 - 30	°C
Feeding zone temperature	60 - 80	°C
Zone1 temperature	290 - 300	°C
Zone2 temperature	310 - 320	°C
Zone3 temperature	330 - 340	°C
Zone4 temperature	330 - 340	°C
Nozzle temperature	310 - 330	°C

FORTRON® 1140L4 - PPS

Melt temperature	330	°C
Mold temperature	140 - 160	°C
Hot runner temperature	330 - 340	°C

Pressure	Value	Unit
Back pressure max.	30	bar

Speed	Value
Injection speed	fast

Screw Speed	Value	Unit
Screw speed diameter, 25mm	120	RPM
Screw speed diameter, 40mm	75	RPM
Screw speed diameter, 55mm	50	RPM

Other	Value	Unit	Test Standard
Specimen thickness (shrinkage)	3.18	mm	Internal

Other text information

Pre-drying

FORTRON should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be $\leq -30^{\circ}\text{C}$. The time between drying and processing should be as short as possible.

Longer pre-drying times/storage

For subsequent storage the material should be stored dry in the dryer until processed (≤ 60 h).

Injection molding

On injection molding machines with 15-25 D long three-section screws, as are usual in the trade, the FORTRON is processable. A shut-off nozzle is preferred to a free-flow nozzle.

Melt temperature 320-340 degC
Mold wall temperature at least 140 degC

A medium injection rate is normally preferred. All mold cavities must be effectively vented.

Injection Molding Preprocessing

Predrying in a dehumidified air dryer at 130 - 140 degC/3-4 hours is recommended.

Injection Molding Postprocessing

Tool temperature of at least 135 degC is recommended for parts to achieve maximum crystallizable potential.

Characteristics

Special Characteristics	Auto spec approved, Flame retardant
Product Categories	Glass reinforced
Processing	Injection molding
Regulatory	Drinking water approved
Delivery Form	Pellets
Additives	Release agent

Other Approvals

OEM	Specification
BMW	GS93016
Bosch	N28 BN14-GF010 (SF3001, SD3002 & SD3002(CN))
Chrysler (FCA)	CPN3502 BLK

FORTRON® 1140L4 - PPS

Chrysler (FCA)	CPN4241 NAT
Daimler	(PPS - GF40) 5420.00
Dongfeng	SLCLBG2019011
FORD	WSL-M4D807-A NAL, BLK & BROWN
GM	GMW 17521 P-PPS-GF40-Type-2 NAT & BLK
Nissan	PPS(B60)-IPL-1
PSA	61/217M-219E/H115/H0412*/13
PSA	01994_15_00075 NAT & BLK
Renault	IP03a

Contact

Americas

8040 Dixie Highway
Florence, KY 41042 USA
Product Information Service
t: +1-800-833-4882
t: +1-859-372-3244
Customer Service
t: +1-800-526-4960
t: +1-859-372-3214
e: info-engineeredmaterials-am@celanese.com

Asia

4560 Jinke Road
Zhang Jiang Hi Tech Park
Shanghai 201210 PRC
Customer Service
t: +86 21 3861 9288
e: info-engineeredmaterials-asia@celanese.com

Europe

Am Unisys-Park 1
65843 Sulzbach, Germany
Product Information Service
t: +49-800-86427-531
t: +49-(0)-69-45009-1011
e: info-engineeredmaterials-eu@celanese.com

General Disclaimer

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colorants or other additives may cause significant variations in data values. Properties of molded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products. The products mentioned herein are not intended for use in medical or dental implants.

Trademark

© 2021 Celanese or its affiliates. All rights reserved. Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates. Fortron is a registered trademark of Fortron Industries LLC.